



Mapped, edited, and published by the Geological Survey

Control by USGS, USC&GS, U.S. Lake Survey, and International Boundary Commission

Topography by photogrammetric methods from aerial photographs taken 1954-56. Field checked 1964

Selected hydrographic data compiled from U.S. Lake Survey Chart 61 (1961)

This information is not intended for navigational purposes


Polyconic projection. 1927 North American datum

10,000-foot grid based on Michigan coordinate system, north zone

1000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue


Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

Revisions shown in purple compiled from aerial photographs taken 1976. This information not field checked

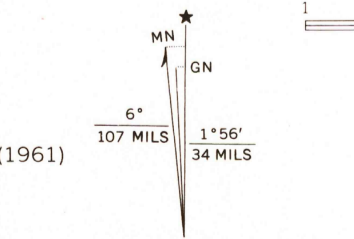

CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS LOW WATER 578.5 FEET

THE U.S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY THE U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

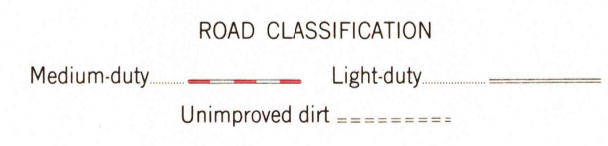

USGS
Historical File
Topographic Division

DRUMMOND, MICH.—ONT.
N4600—W8337.5/7.5

1964
PHOTOREVISED 1976
AMS 4276 II SW—SERIES V862

JUL 06 1978

7/00