




Mapped, edited, and published by the Geological Survey
Control by USGS, NOS/NOAA, and International Boundary Commission
Planimetry by photogrammetric methods from aerial photographs
taken 1976. Topography by photogrammetric methods from aerial
photographs taken 1956. Revised from aerial photographs
taken 1977. Field checked 1978. Map edited 1981
Canadian portion copied from Basswood Lake quadrangle
(1:50 000) 1969, Department of Energy, Mines, and Resources
Projection and 10,000-foot grid ticks: Minnesota coordinate
system, north zone (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 15
1927 North American Datum
To place on the predicted North American Datum 1983
move the projection lines 5 meters north and
12 meters east as shown by dashed corner ticks

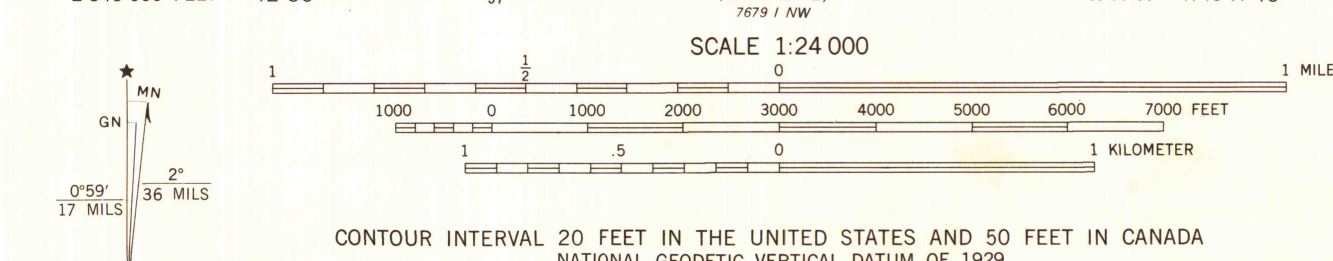

CONTOUR INTERVAL 20 FEET IN THE UNITED STATES AND 50 FEET IN CANADA
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



BASSWOOD LAKE WEST, MINN.-ONT.
SW/4 BASSWOOD LAKE 15' QUADRANGLE
N4800-W9137.5/7.5

ROAD CLASSIFICATION
Trails

MAP AND AIR PHOTO
LIBRARY
JUN 21 1982
University of Wisconsin
Madison